

www.hengtonggroup.com/en



Hengtong Optic-Electric Co., Ltd.
Stock Code: 600487
No. 2288, North Zhongshan Rd.,
Wujiang District, Suzhou City, Jiangsu Province, China
Website: www.hengtonggroup.com/en
Email: info@hengtonggroup.com
Tel: +86 512 6395 7850
Fax: +86 512 6395 7922



@ Hengtong Group



@ Hengtong Group



@ Hengtong Group

Version: 2019-01


GENERAL OUTDOOR OPTICAL FIBER CABLE

HENG TONG OPTIC-ELECTRIC
A Global Information and Energy Network
Service Provider



Introduction

Company introduction	01
Product overview	03
Global service network	29

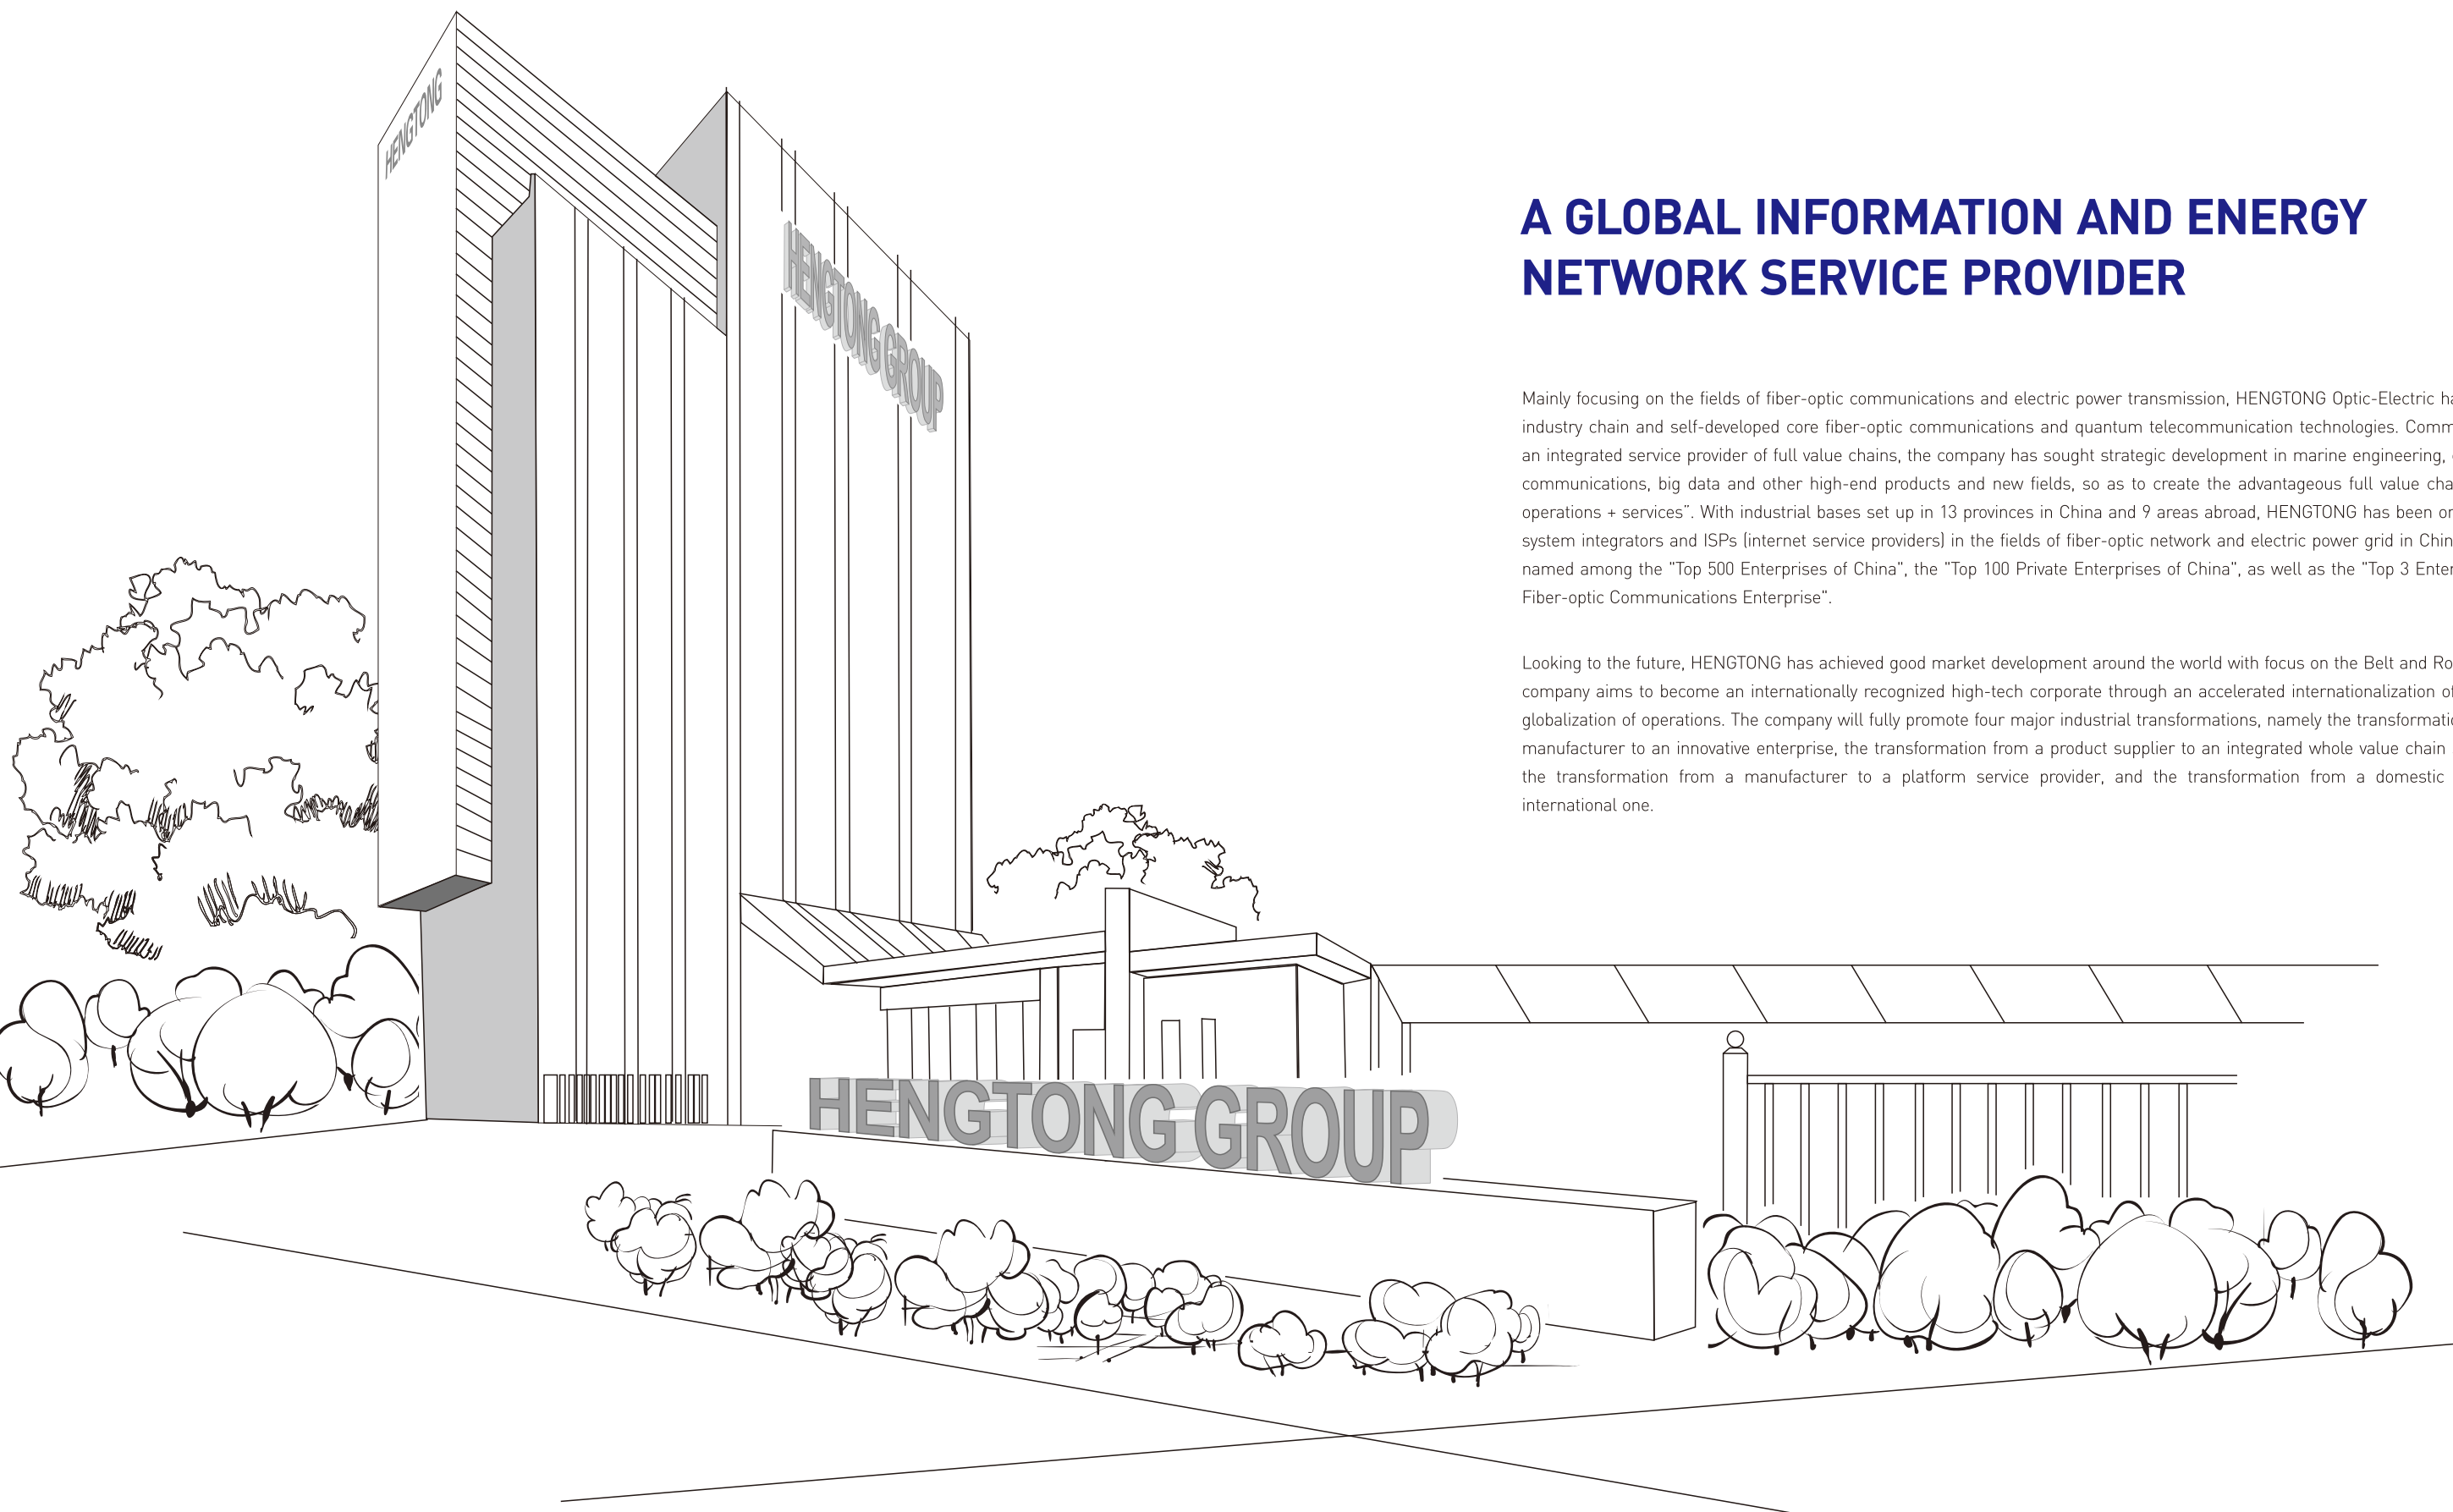

A GLOBAL INFORMATION AND ENERGY NETWORK SERVICE PROVIDER

Mainly focusing on the fields of fiber-optic communications and electric power transmission, HENG TONG Optic-Electric has built up a full industry chain and self-developed core fiber-optic communications and quantum telecommunication technologies. Committed to building an integrated service provider of full value chains, the company has sought strategic development in marine engineering, quantum secure communications, big data and other high-end products and new fields, so as to create the advantageous full value chain of "product + operations + services". With industrial bases set up in 13 provinces in China and 9 areas abroad, HENG TONG has been one of the leading system integrators and ISPs (internet service providers) in the fields of fiber-optic network and electric power grid in China, and has been named among the "Top 500 Enterprises of China", the "Top 100 Private Enterprises of China", as well as the "Top 3 Enterprises of Global Fiber-optic Communications Enterprise".

Looking to the future, HENG TONG has achieved good market development around the world with focus on the Belt and Road Initiative. The company aims to become an internationally recognized high-tech corporate through an accelerated internationalization of production and globalization of operations. The company will fully promote four major industrial transformations, namely the transformation from an R&D manufacturer to an innovative enterprise, the transformation from a product supplier to an integrated whole value chain service provider, the transformation from a manufacturer to a platform service provider, and the transformation from a domestic company to an international one.


Contents

- GYTA**
Duct and Non-Self Supporting Aerial Cable 05
- GYTS**
Duct and Non-Self Supporting Aerial Cable 06
- GYFTY**
Duct and Non-Self Supporting Aerial Cable 07
- GYFTA**
Duct and Non-Self Supporting Aerial Cable 08
- GYFTW**
Duct and Non-Self Supporting Aerial Cable 09
- GYXTW**
Duct and Non-Self Supporting Aerial Cable 10
- GYXTS**
Duct and Non-Self Supporting Aerial Cable 11
- GYTY53**
Direct Buried Cable 12
- GYTA53**
Direct Buried Cable 13
- GYFTY53**
Direct Buried Cable 14
- GYFTA53**
Direct Buried Cable 15
- ADSS**
All Dielectric Self-supporting Aerial Optic Fiber Cable 16

- GYDTA**
Ribbon Optic Fiber Cable 17
- GYDTS**
Ribbon Optic Fiber Cable 18
- GYDXTW**
Ribbon Optic Fiber Cable 19
- GYDGA**
Ribbon Optic Fiber Cable 20
- GYTC8Y**
FIG 8 Self-supporting Aerial Optic Fiber Cable 21
- GYTC8A**
FIG 8 Self-supporting Aerial Optic Fiber Cable 22
- GYTC8S**
FIG 8 Self-supporting Aerial Optic Fiber Cable 23
- GYXTC8Y**
FIG 8 Self-supporting Aerial Optic Fiber Cable 24
- GYXTC8S**
FIG 8 Self-supporting Aerial Optic Fiber Cable 25
- GYTA33**
Shallow Water Optical Fiber Cable 26
- GYTS333**
Shallow Water Optical Fiber Cable 27

GYTA

Duct and Non-Self Supporting Aerial Cable

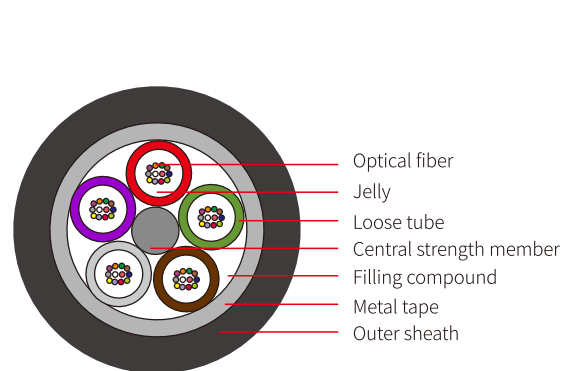

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Steel wire
Sheath Options: Single PE Sheath
Aarmor: Aluminum tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture aluminum tape

Applications

Duct and non-self supporting aerial

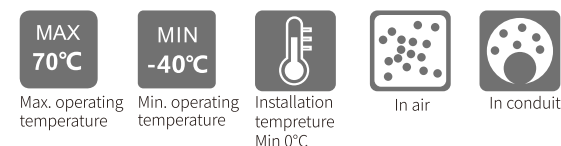

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYTA	30	1500	600	1000	300	20D	10D	8.9	75
GYTA	36	1500	600	1000	300	20D	10D	9.3	88
GYTA	60	1500	600	1000	300	20D	10D	9.9	93
GYTA	72	1500	600	1000	300	20D	10D	10.5	116
GYTA	96	1500	600	1000	300	20D	10D	12.1	145
GYTA	120	1500	600	1000	300	20D	10D	13.5	172
GYTA	144	1500	600	1000	300	20D	10D	15.0	204

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYTS

Duct and Non-Self Supporting Aerial Cable

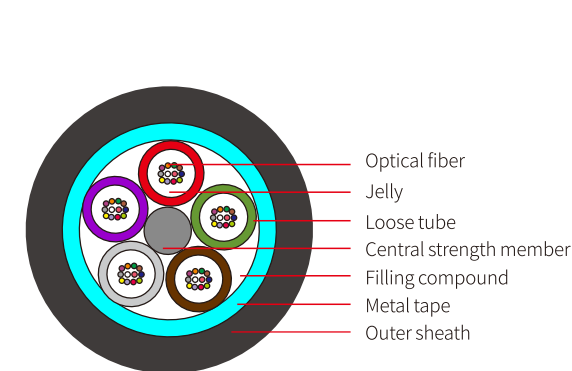

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Steel wire
Sheath Options: Single PE Sheath
Aarmor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture corrugated steel tape

Applications

Duct and non-self supporting aerial

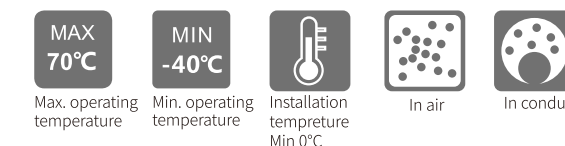

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYTS	30	1500	600	1000	300	20D	10D	9.1	92
GYTS	36	1500	600	1000	300	20D	10D	9.4	105
GYTS	60	1500	600	1000	300	20D	10D	10.0	112
GYTS	72	1500	600	1000	300	20D	10D	10.6	136
GYTS	96	1500	600	1000	300	20D	10D	12.1	165
GYTS	120	1500	600	1000	300	20D	10D	13.5	195
GYTS	144	1500	600	1000	300	20D	10D	15.0	231

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYFTY

Duct and Non-Self Supporting Aerial Cable

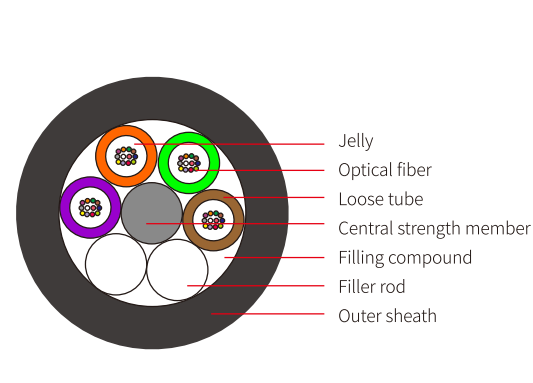

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: FRP
Sheath Options: Single PE Sheath
Armor: None
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Perfect lightning protection effect with all-dielectric materials

Applications

Duct and non-self supporting aerial

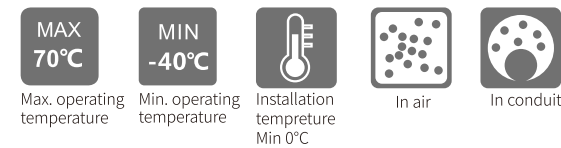

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYFTY	36	1500	600	1000	300	20D	10D	9.7	79
GYFTY	48	1500	600	1000	300	20D	10D	10.9	105
GYFTY	72	1500	600	1000	300	20D	10D	11.1	103
GYFTY	96	1500	600	1000	300	20D	10D	12.7	136
GYFTY	120	1500	600	1000	300	20D	10D	14.2	167
GYFTY	144	1500	600	1000	300	20D	10D	15.9	204
GYFTY	288	1500	600	1000	300	20D	10D	18.3	270

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYFTA

Duct and Non-Self Supporting Aerial Cable

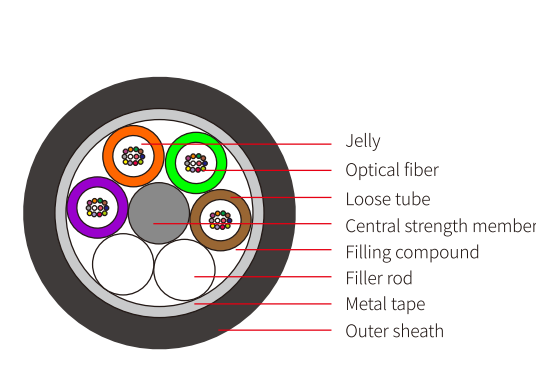

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: FRP
Sheath Options: Single PE Sheath
Armor: Aluminum tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture aluminum tape

Applications

Duct and non-self supporting aerial

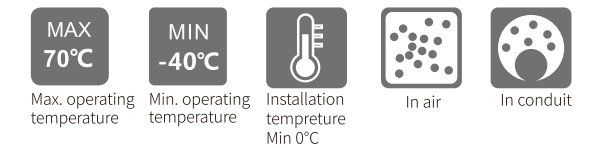

Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYFTA	36	1500	600	1000	300	20D	10D	10.2	87
GYFTA	48	1500	600	1000	300	20D	10D	11.4	111
GYFTA	72	1500	600	1000	300	20D	10D	11.6	112
GYFTA	96	1500	600	1000	300	20D	10D	13.4	152
GYFTA	120	1500	600	1000	300	20D	10D	14.9	185
GYFTA	144	1500	600	1000	300	20D	10D	16.6	224
GYFTA	288	1500	600	1000	300	20D	10D	19.0	288

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYFTW Duct and Non-Self Supporting Aerial Cable

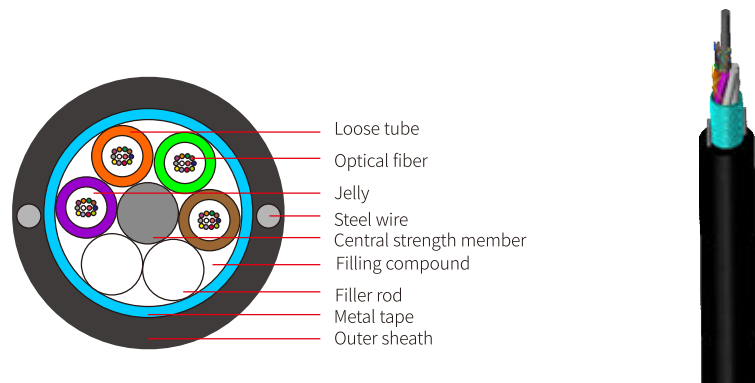

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: FRP and parallel Steel wire
Sheath Options: Single PE Sheath
Armor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture corrugated steel tape

Applications

Duct and non-self supporting aerial

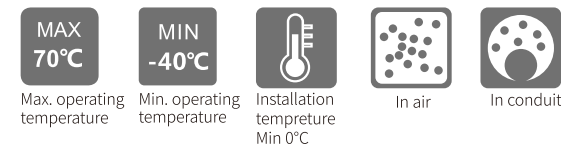

Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYFTW	36	2700	1000	2200	1000	20D	10D	12.0	146
GYFTW	72	2700	1000	2200	1000	20D	10D	13.4	179
GYFTW	96	2700	1000	2200	1000	20D	10D	15.0	219
GYFTW	120	2700	1000	2200	1000	20D	10D	16.6	262
GYFTW	144	2700	1000	2200	1000	20D	10D	18.2	312

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYXTW Duct and Non-Self Supporting Aerial Cable

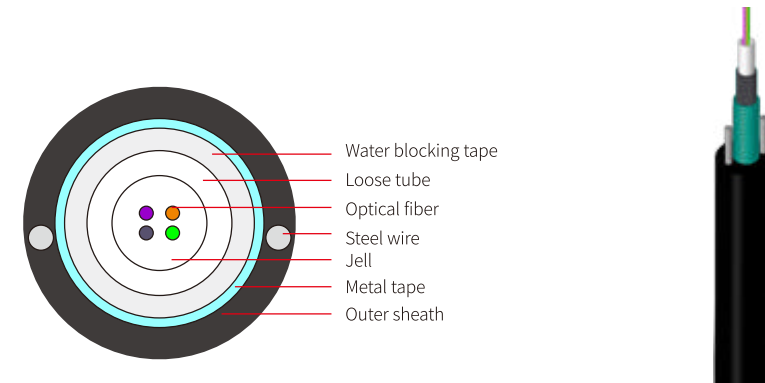

Technical data

Fiber: Up to 24, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: Central tube
Strength Member: Parallel Steel wire
Sheath Options: Single PE Sheath
Armor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture corrugated steel tape

Applications

Duct and non-self supporting aerial

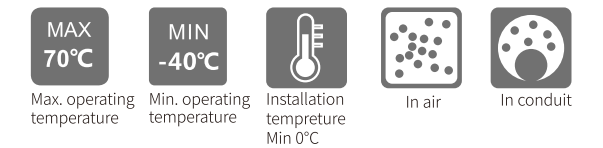

Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYXTW	6	1500	600	1000	300	20D	10D	8.3	74
GYXTW	12	1500	600	1000	300	20D	10D	8.5	75
GYXTW	18	1500	600	1000	300	20D	10D	8.9	83
GYXTW	24	1500	600	1000	300	20D	10D	9.3	87
GYXTW	6	3000	1000	1000	300	20D	10D	9.2	98
GYXTW	12	3000	1000	1000	300	20D	10D	9.4	99
GYXTW	18	3000	1000	1000	300	20D	10D	9.8	109

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYXTS Duct and Non-Self Supporting Aerial Cable

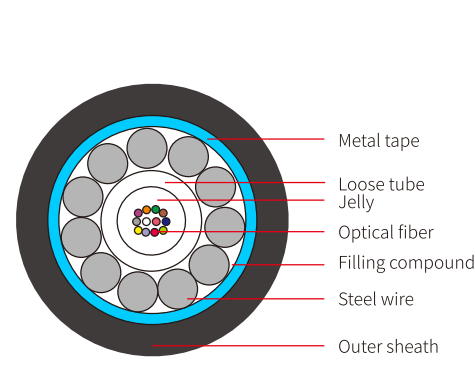

Technical data

Fiber: Up to 24, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: Central tube
Strength Member: Steel wire
Sheath Options: Single PE Sheath
Armor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture corrugated steel tape

Applications

Duct and non-self supporting aerial

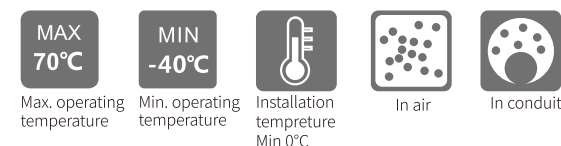

Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYXTS	6	1500	600	1000	300	20D	10D	9.0	110
GYXTS	12	1500	600	1000	300	20D	10D	9.2	122
GYXTS	6	3000	1000	1000	300	20D	10D	9.4	129
GYXTS	12	3000	1000	1000	300	20D	10D	9.6	142

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYTY53 Direct Buried Cable

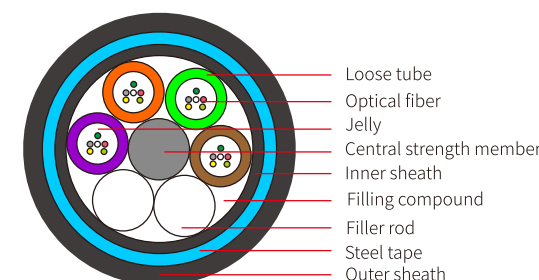

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Steel wire
Sheath Options: Double PE Sheath
Armor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Double sheath with single armor
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture corrugated steel tape

Applications

Direct buried



Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYTY53	36	3000	1000	3000	1000	25D	12.5D	11.6	161
GYTY53	60	3000	1000	3000	1000	25D	12.5D	12.2	171
GYTY53	72	3000	1000	3000	1000	25D	12.5D	12.8	198
GYTY53	96	3000	1000	3000	1000	25D	12.5D	14.1	234
GYTY53	120	3000	1000	3000	1000	25D	12.5D	15.5	269
GYTY53	144	3000	1000	3000	1000	25D	12.5D	17.0	311

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYTA53 Direct Buried Cable

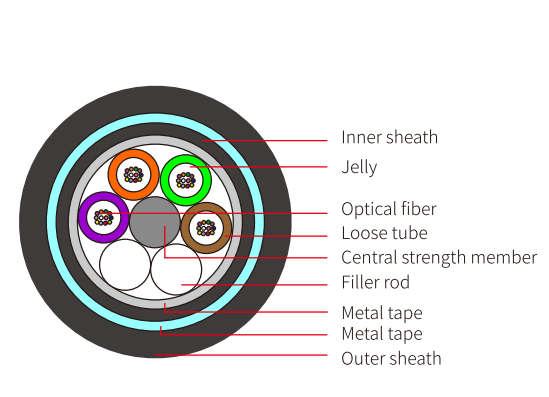

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Steel wire
Sheath Options: Double PE Sheath
Armor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards



Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Double sheath with double armor
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture aluminum tape and steel tape

Applications

Direct buried

MAX
70°C

MIN
-40°C

Installation
temperature
Min 0°C

Direct buried

Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYTA53	36	3000	1000	3000	1000	25D	12.5D	12.4	161
GYTA53	60	3000	1000	3000	1000	25D	12.5D	13.0	171
GYTA53	72	3000	1000	3000	1000	25D	12.5D	13.6	198
GYTA53	96	3000	1000	3000	1000	25D	12.5D	15.0	234
GYTA53	120	3000	1000	3000	1000	25D	12.5D	16.4	269
GYTA53	144	3000	1000	3000	1000	25D	12.5D	17.9	311

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYFTY53 Direct Buried Cable

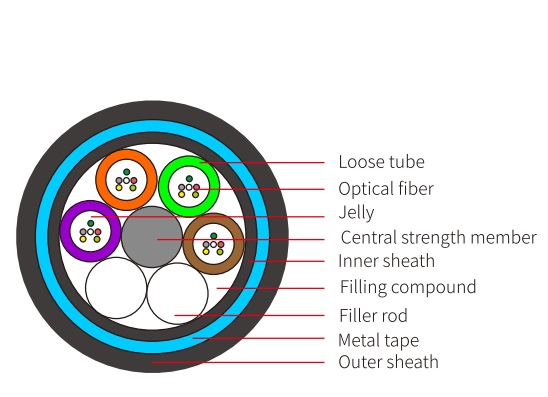

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: FRP
Sheath Options: Double PE Sheath
Armor: Steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards



Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Double sheath with single armor
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture corrugated steel tape

Applications

Direct buried

MAX
70°C

MIN
-40°C

Installation
temperature
Min 0°C

Direct buried

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYFTY53	48	3000	1000	3000	1000	25D	12.5D	13.6	174
GYFTY53	96	3000	1000	3000	1000	25D	12.5D	15.4	217
GYFTY53	120	3000	1000	3000	1000	25D	12.5D	16.9	256
GYFTY53	144	3000	1000	3000	1000	25D	12.5D	18.6	303
GYFTY53	288	3000	1000	3000	1000	25D	12.5D	21.0	377

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYFTA53

Direct Buried Cable

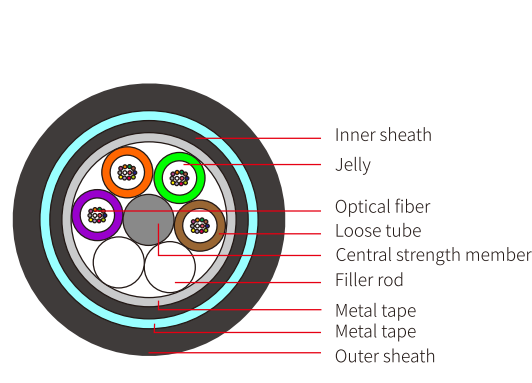

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: FRP
Sheath Options: Double PE Sheath
Armor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Double sheath with double armor
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture aluminum tape and steel tape

Applications

Duct and direct buried



Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5µm (850nm/1300nm)	50µm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYFTA53	48	3000	1000	3000	1000	25D	12.5D	14.5	192
GYFTA53	96	3000	1000	3000	1000	25D	12.5D	16.3	242
GYFTA53	120	3000	1000	3000	1000	25D	12.5D	17.8	283
GYFTA53	144	3000	1000	3000	1000	25D	12.5D	19.5	333
GYFTA53	288	3000	1000	3000	1000	25D	12.5D	21.9	409

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

ADSS

All Dielectric Self-supporting Aerial Optic Fiber Cable

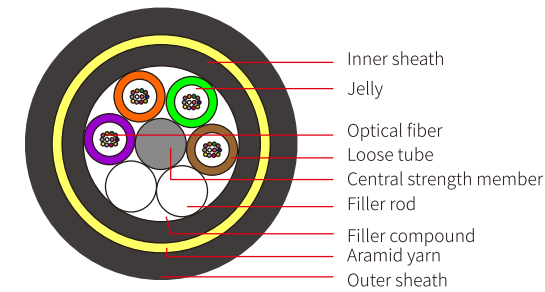

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: FRP
Sheath Options: Double PE Sheath
Armor: Aramid yarn
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Gel-filled loose tube protect the fiber well
- All dielectric material good for application in thunder area
- Armored with aramid yarn

Applications

All dielectric self-supporting aerial



Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5µm (850nm/1300nm)	50µm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		RTS	MAT	Short term	Long term	Dynamic	Static		
ADSS	24	40000	16000	2200	1000	25D	12.5D	13.4	145
ADSS	36	40000	16000	2200	1000	25D	12.5D	13.9	155
ADSS	72	40000	16000	2200	1000	25D	12.5D	14.8	182
ADSS	96	40000	16000	2200	1000	25D	12.5D	16.4	220
ADSS	120	40000	16000	2200	1000	25D	12.5D	18.0	262
ADSS	144	40000	16000	2200	1000	25D	12.5D	18.9	290

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYDTA Ribbon Optic Fiber Cable

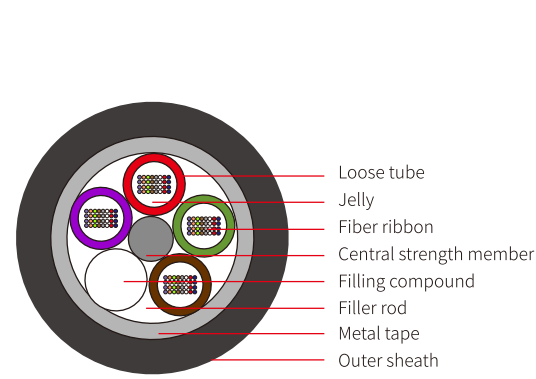

Technical data

Fiber: Up to 864, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Steel wire
Sheath Options: Single PE Sheath
Armor: Aluminum tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- High fiber density
- Easy to install
- Armored with anti-moisture aluminum tape

Applications

Duct and non-self supporting aerial

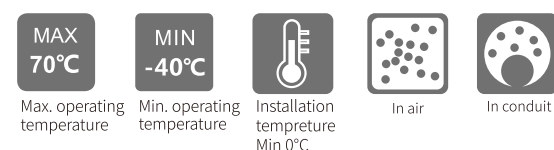

Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYDTA	144	1500	600	1000	300	20D	10D	16.8	246
GYDTA	192	1500	600	1000	300	20D	10D	17.4	273
GYDTA	216	1500	600	1000	300	20D	10D	19.6	328
GYDTA	288	1500	600	1000	300	20D	10D	18.5	313
GYDTA	432	1500	600	1000	300	20D	10D	21.7	418
GYDTA	576	1500	600	1000	300	20D	10D	22.3	439

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYDTS Ribbon Optic Fiber Cable

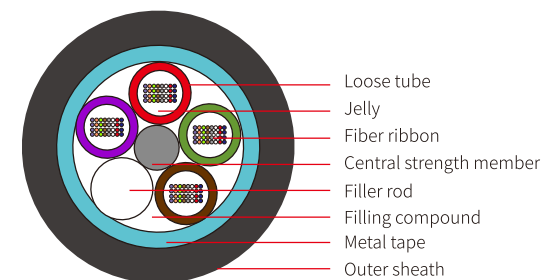

Technical data

Fiber: Up to 864, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Steel wire
Sheath Options: Single PE Sheath
Armor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- High fiber density
- Easy to install
- Armored with anti-moisture steel tape

Applications

Duct and non-self supporting aerial

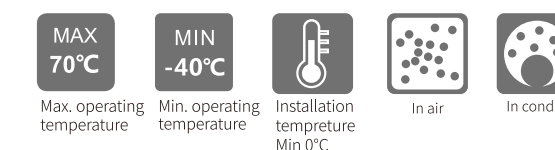

Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYDTS	144	1500	600	1000	300	20D	10D	16.8	246
GYDTS	192	1500	600	1000	300	20D	10D	17.4	273
GYDTS	216	1500	600	1000	300	20D	10D	19.6	328
GYDTS	288	1500	600	1000	300	20D	10D	18.5	313
GYDTS	432	1500	600	1000	300	20D	10D	21.7	418
GYDTS	576	1500	600	1000	300	20D	10D	22.3	439

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYDXTW Ribbon Optic Fiber Cable

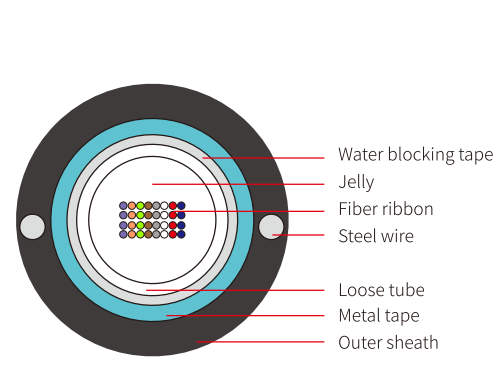

Technical data

Fiber: Up to 432, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: Central tube
Strength Member: Parallel steel wire
Sheath Options: Single PE Sheath
Armor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- High fiber density
- Easy to install
- Armored with anti-moisture steel tape

Applications

Duct and non-self supporting aerial

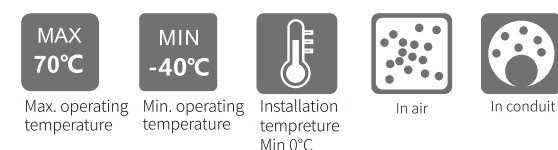

Fiber Transmission Performance


Cabled Optical fiber (dB/km)	62.5µm (850nm/1300nm)	50µm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYDXTW	48	1500	600	1000	300	20D	10D	13.4	172
GYDXTW	72	1500	600	1000	300	20D	10D	14.2	191
GYDXTW	96	1500	600	1000	300	20D	10D	14.6	201
GYDXTW	144	1500	600	1000	300	20D	10D	16.0	239
GYDXTW	216	1500	600	1000	300	20D	10D	18.0	298
GYDXTW	288	1500	600	1000	300	20D	10D	18.8	320
GYDXTW	432	1500	600	1000	300	20D	10D	20.3	372

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYDGA Ribbon Optic Fiber Cable

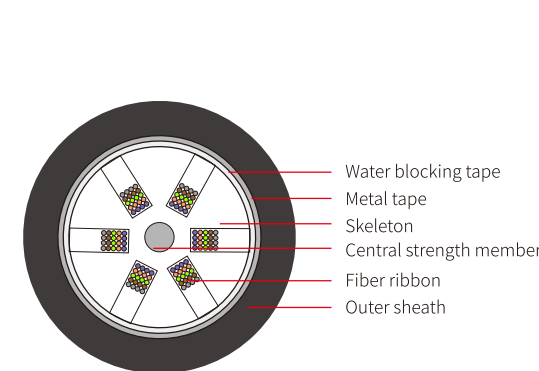

Technical data

Fiber: Up to 288, Dry material
Fiber Types: Single-mode and Multimode
Cable Constructions: Slotted core
Strength Member: Steel wire
Sheath Options: Single PE Sheath
Armor: Aluminum tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- High fiber density
- Easy to install with dry structure
- Armored with anti-moisture aluminum tape

Applications

Duct and non-self supporting aerial

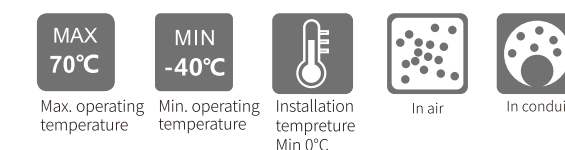

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5µm (850nm/1300nm)	50µm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYDGA	72	3000	1000	3000	1000	25D	12.5D	17.3	280
GYDGA	96	3000	1000	3000	1000	25D	12.5D	17.3	281
GYDGA	120	3000	1000	3000	1000	25D	12.5D	18.5	307
GYDGA	144	3000	1000	3000	1000	25D	12.5D	19.1	325
GYDGA	216	3000	1000	3000	1000	25D	12.5D	21.7	398
GYDGA	288	3000	1000	3000	1000	25D	12.5D	22.4	426

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYTC8Y

FIG 8 Self-supporting Aerial Optic Fiber Cable

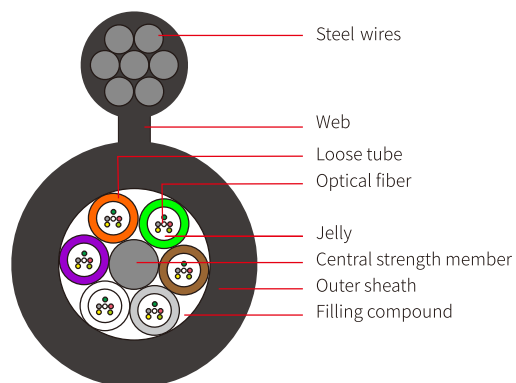

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Stranded steel wires
Sheath Options: Single PE Sheath
Armor: None
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well

Applications

Self-supporting aerial

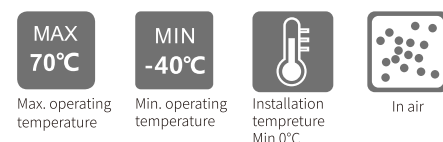

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYTC8Y	30	3000	1000	1000	300	20D	10D	8.6×16.4	133
GYTC8Y	60	3000	1000	1000	300	20D	10D	9.6×17.4	155
GYTC8Y	30	4500	1500	1000	300	20D	10D	8.6×17.0	155
GYTC8Y	60	4500	1500	1000	300	20D	10D	9.6×18.0	177
GYTC8Y	30	7000	2000	1000	300	20D	10D	8.6×18.2	213
GYTC8Y	60	7000	2000	1000	300	20D	10D	9.6×19.2	234

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYTC8A

FIG 8 Self-supporting Aerial Optic Fiber Cable

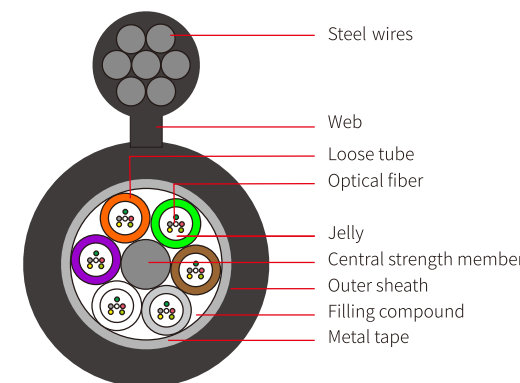

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Stranded steel wires
Sheath Options: Single PE Sheath
Armor: Aluminum tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture aluminum tape

Applications

Self-supporting aerial

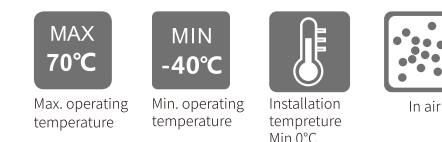

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYTC8A	30	3000	1000	1000	300	20D	10D	9.1×16.9	142
GYTC8A	60	3000	1000	1000	300	20D	10D	10.1×17.9	165
GYTC8A	30	4500	1500	1000	300	20D	10D	9.1×17.5	164
GYTC8A	60	4500	1500	1000	300	20D	10D	10.1×18.5	187
GYTC8A	30	7000	2000	1000	300	20D	10D	9.1×18.7	222
GYTC8A	60	7000	2000	1000	300	20D	10D	10.1×19.7	245

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYTC8S

FIG 8 Self-supporting Aerial Optic Fiber Cable

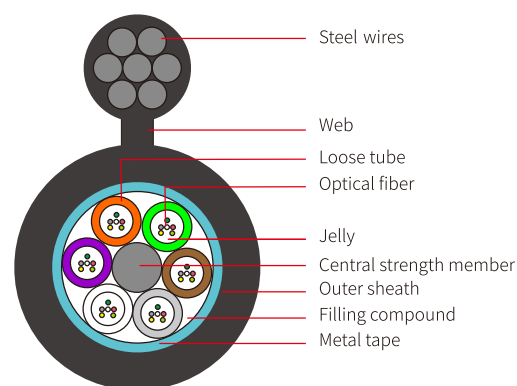

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Stranded steel wires
Sheath Options: Single PE Sheath
Armor: Steel tape
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture corrugated steel tape

Applications

Self-supporting aerial

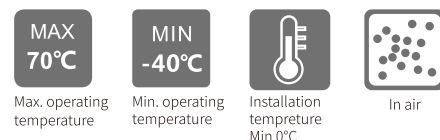

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYTC8S	30	3000	1000	1000	300	20D	10D	9.1×16.9	156
GYTC8S	60	3000	1000	1000	300	20D	10D	10.1×17.9	182
GYTC8S	30	4500	1500	1000	300	20D	10D	9.1×17.5	178
GYTC8S	60	4500	1500	1000	300	20D	10D	10.1×18.5	204
GYTC8S	30	7000	2000	1000	300	20D	10D	9.1×18.7	236
GYTC8S	60	7000	2000	1000	300	20D	10D	10.1×19.7	261

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYXTC8Y

FIG 8 Self-supporting Aerial Optic Fiber Cable

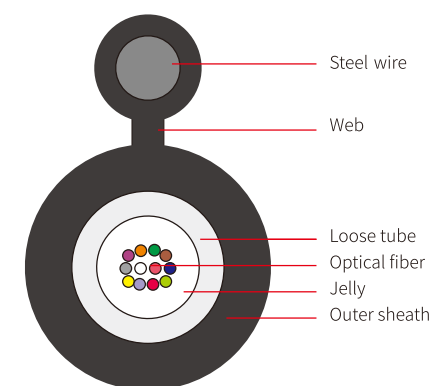

Technical data

Fiber: Up to 24, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: Central tube
Strength Member: Steel wire
Sheath Options: Single PE Sheath
Armor: None
Operating Temperature: -40°C - 70°C
Compliances: In accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well

Applications

Self-supporting aerial

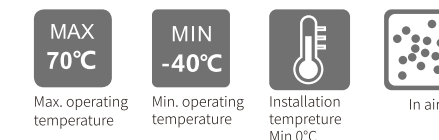

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYXTC8Y	12	1000	300	1000	300	20D	10D	5.1×10.2	47
GYXTC8Y	24	1000	300	1000	300	20D	10D	5.7×10.8	54
GYXTC8Y	12	3000	1000	1000	300	20D	10D	6.0×12.9	88
GYXTC8Y	24	3000	1000	1000	300	20D	10D	6.6×13.5	95

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYXC8S

FIG 8 Self-supporting Aerial Optic Fiber Cable

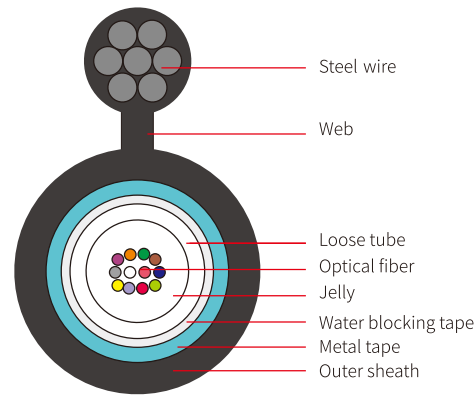

Technical data

Fiber: Up to 24, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: Central tube
Strength Member: Stranded steel wires
Sheath Options: Single PE Sheath
Armor: Corrugated steel tape
Operating Temperature: -40°C - 70°C
Compliances: In accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good water resistance performance
- Easy to install
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture corrugated steel tape

Applications

Self-supporting aerial



Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYXC8S	12	3000	1000	1000	300	20D	10D	7.6×14.5	117
GYXC8S	24	3000	1000	1000	300	20D	10D	8.5×15.4	128
GYXC8S	12	4500	1500	1000	300	20D	10D	7.6×15.1	137
GYXC8S	24	4500	1500	1000	300	20D	10D	8.5×16.0	148

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYTA33

Shallow Water Optical Fiber Cable

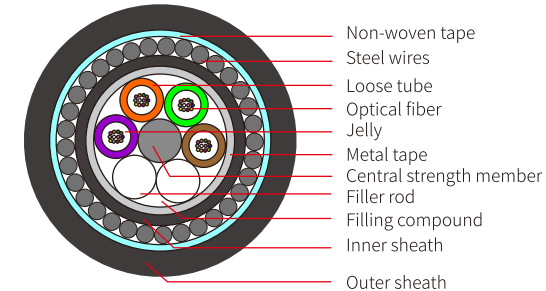

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Steel wire
Sheath Options: Double PE Sheath
Armor: Aluminum tape+steel wires
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance
- Good performance for crush and tensile
- Double sheath with double armor
- Armored with steel wires and anti-moisture aluminum tape

Applications

Shallow water and direct buried

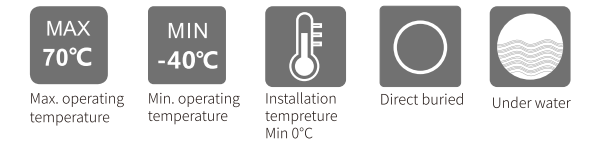

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (OM1) (850nm/1300nm)	50μm (OM2) (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24


Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYTA33	30	10000	4000	5000	3000	25D	12.5D	14.6	349
GYTA33	36	10000	4000	5000	3000	25D	12.5D	14.9	372
GYTA33	60	10000	4000	5000	3000	25D	12.5D	15.5	379
GYTA33	72	10000	4000	5000	3000	25D	12.5D	16.1	433
GYTA33	96	10000	4000	5000	3000	25D	12.5D	17.7	508
GYTA33	120	10000	4000	5000	3000	25D	12.5D	18.9	544
GYTA33	144	10000	4000	5000	3000	25D	12.5D	20.4	642

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GYTS333

Shallow Water Optical Fiber Cable

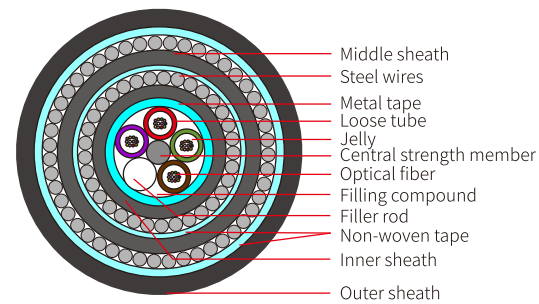

Technical data

Fiber: Up to 288, Gel-filled
Fiber Types: Single-mode and Multimode
Cable Constructions: S-Z Stranded loose tube
Strength Member: Steel wire
Sheath Options: Triple PE Sheath
Armor: Corrugated steel tape +steel wires
Operating Temperature: -40°C - 70°C
Compliances: In Accordance with IEC, ITU and EIA standards



Features

- Excellent mechanical and environmental performance
- Triple sheath with triple armor
- Gel-filled loose tube protect the fiber well
- Armored with anti-moisture steel tape
- And two layers of steel wires

Applications

Shallow water and direct buried

Max. operating temperature

Min. operating temperature

Installation temperature
Min 0°C

Direct buried

Under water

Fiber Transmission Performance

Cabled Optical fiber (dB/km)	62.5μm (OM1) (850nm/1300nm)	50μm (OM2) (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.655 (1550nm / 1625nm)
Max attenuation	3.5/1.5	3.5/1.5	0.36/0.22	0.22/0.26
Typical value	3.0/1.0	3.0/1.0	0.35/0.21	0.21/0.24

Technical Specification

Cable type	Maximum cores	Tensile Strength		Crush Resistance		Minimum bend radius		Cable diameter	Cable weight
		Short term	Long term	Short term	Long term	Dynamic	Static		
GYTS333	36	40000	20000	6000	4000	30D	15D	23.7	1339
GYTS333	60	40000	20000	6000	4000	30D	15D	23.9	1341
GYTS333	72	40000	20000	6000	4000	30D	15D	24.5	1419
GYTS333	96	40000	20000	6000	4000	30D	15D	25.1	1420
GYTS333	120	40000	20000	6000	4000	30D	15D	26.5	1541
GYTS333	144	40000	20000	6000	4000	30D	15D	26.8	1458

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GLOBAL SERVICE NETWORK

International Representative Offices

Contact Information

info@hengtonggroup.com

Africa Region

DR Congo
Ethiopia
Kenya
Republic of the Congo
Uganda
Zambia

America Region

Argentina
Bolivia
Chile
Colombia
Ecuador
Mexico
Peru

Asia Pacific Region

Australia
Bangladesh
Cambodia
India
Indonesia
Malaysia
Myanmar
Nepal
Pakistan
Philippines
Singapore
Sri Lanka
Taiwan, China
Thailand
Vietnam

Brazil Hengtong

Brazil

Middle East and North Africa Region

Algeria
Dubai (Bay sea area)
Egypt
Jordan
Lebanon
Morocco (West Africa&North Africa Region)

Europe Region

Baltic
Georgia
Italy
Poland
Serbia
Turkey
Ukraine

Russia Region

Russia

Domestic Representative Offices

Hengtong (Beijing) Representative Office

Room B1803, Digital Building, No. 2 Zhongguancun South Avenue, Haidian District, Beijing, China
Tel: 010-51626988
Fax: 010-51626998

Hengtong (Guangdong) Representative Office

Room 1402, Bldg A, Fengxing Plaza, No. 67, Tianhe East Road, Tianhe District, Guangzhou, Guangdong Province, China
Tel/Fax: 020-87599616

Hengtong (Zhejiang) Representative Office

Room 1002, Huayuan Development Building, No. 639, Jianguo North Road, Xiacheng District, Hangzhou, Zhejiang Province, China
Tel/Fax: 0571-85392807

Hengtong (Hunan) Representative Office

Rooms 2118 and 2119, Business Building, Dahua Hotel, Dongtang, No. 528, Laodong West Road, Yuhua District, Changsha, Hunan Province, China
Tel/Fax: 0731-89710847

Hengtong (Henan) Representative Office

Room 1909, Tower A, Guomao Building, Garden Road (Southwest of the intersection with Nongye Road), Jinshui District, Zhengzhou, Henan Province, China
Tel/Fax: 0371-65720119

Hengtong (Guizhou) Representative Office

Room 704, Bldg A, Quanlin International Plaza, No. 196, Fushui South Road, Nanming District, Guiyang, China

Hengtong (Liaoning) Representative Office

Room 66-B-10C, No. 225, Youth Street, Shenhe District, Shenyang, China
Tel/Fax: 0451-51444018

Hengtong (Luoyang) Representative Office

Room 5-2-701, Zhongfu Jinyuan Community, Qianjing South Road, Jianxi District, Luoyang, China

Hengtong (Shanghai) Representative Office

12/F, Bldg A, Far East International Plaza, No. 319, Xianxia Road, Shanghai, China
Tel: 021-32084666-8030
Tel: 021-32084666-8072

Hengtong (Shenzhen) Representative Office

Rooms A703 and A503, Ruijingge, Hongrui Garden Community; and Room 2B, Bldg B, Lantiange, Xililantian Garden Community, Shenzhen, China
Tel/Fax: 020-87599616

Hengtong (Jiangsu) Representative Office

Room 602, No. 8, Huju South Road, Nanjing, Jiangsu Province, China
Tel: 025-83464575
Fax: 0512-63800538

Hengtong (Hubei) Representative Office

Room 1-2-604, Taiyin Building, No. 1, Changning Community, Changqing Road, Jiangnan District, Wuhan, Hubei Province, China
Tel/Fax: 027-82647420

Hengtong (Hebei) Representative Office

Room 1-A9, 1/F, Attached Bldg, Fortune Center, No. 86, Guang'an Street, Chang'an District, Shijiazhuang, Hebei Province, China
Tel/Fax: 0311-66159890

Hengtong (Yunnan) Representative Office

15/F, Tower C, No. 96, Beijing Road, Kunming, China
Tel/Fax: 0871-65640310

Hengtong (Heilongjiang) Representative Office

Room 1-1-510, No. 146, Dongdazhi Street, Nangang District, Harbin, China
Tel/Fax: 0451-51444018

Hengtong (Tianjin) Representative Office

Room 609, Bldg 3, Yitian Garden Community (West of the intersection of Baotou Avenue and Xizang Road), Nanmenwai Street, Heping District, Tianjin, China
Tel/Fax: 022-23450605

Hengtong (Fujian) Representative Office

Room 2203, Lippo Tianma Plaza, No. 1, Wuyi North Road, Gulou District, Fuzhou, China
Tel/Fax: 0591-83314244

Hengtong (Jiangxi) Representative Office

Room 1508, Nanbin International Financial Building, Nanchang, Jiangxi Province, China
Tel/Fax: 0791-86255821

Hengtong (Shandong) Representative Office

Room 910, Bldg A, Wanda Plaza, Jingsi Road, Shizhong District, Jinan, Shandong Province, China
Tel: 0531-81766682
Fax: 0531-81766683

Hengtong (Shaanxi) Representative Office

Room 12507, Bldg 13-1 (2507, Langchen Building), Gaoxin 4th Road, High-tech Zone, Xi'an, China
Tel/Fax: 029-88339411

Hengtong (Gansu) Representative Office

Room 1303, 13/F, Bldg C, Century Plaza, No. 352, Qingyang Road, Chengguan District, Lanzhou, China
Tel/Fax: 0931-8824359

Hengtong (Jilin) Representative Office

Room 1401, Bldg C46, Changchunmingzhu Community, No. 8668, Renmin Street, Nangan District, Changchun, China
Tel/Fax: 020-87599616

Hengtong (Chongqing) Representative Office

Room 7-2, No. 1, Fortune Avenue, Yubei District, Chongqing, China
Tel/Fax: 023-68691819

Hengtong (Guangxi) Representative Office

Room 906, Tower E, Huidong International Building, Jinpu Road, Qingxiu District, Nanning, Guangxi, China
Tel/Fax: 0771-5717234

Hengtong (Anhui) Representative Office

Rooms 2527, 2528 and 2529, East Community, Impression West Lake Garden, Wangjiang West Road, Shushan District, Hefei, China
Tel/Fax: 0551-65622957

Hengtong (Shanxi) Representative Office

No. 2 Jiefang South Road, Yingze District, Taiyuan, Shanxi Province, China
Tel/Fax: 0351-4605240

Hengtong (Sichuan) Representative Office

Times 8 (No. 2, Bldg 33), No. 68, Zhiquanduan, East Street, Jinjiang District, Chengdu, Sichuan Province, China
Tel/Fax: 028-84455529

Hengtong (Xinjiang) Representative Office

Room H, 14/F, Tower B, Times Square, No. 30, Guangming Road, Tianshan District, Urumqi, Xinjiang, China
Tel/Fax: 0991-4529183

Hengtong (Inner Mongolia) Representative Office

Room 1051-16, 5/F, Changxing Building, Daxue West Street, Saihan District, Hohhot, Inner Mongolia, China
Tel/Fax: 0471-3396565